




## RIOG2

### LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-20V
- Driver input current: 0.11A
- Driver output current: 0.3A
- LED chips: 36pcs SMD2835
- Power factor: 0.5
- Material: iron & aluminium, copper powder coated white & acrylic
- Ambient Temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

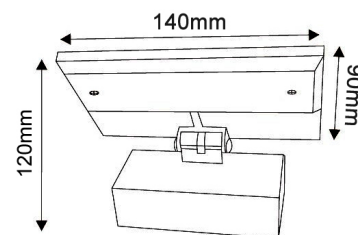

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
RIOG2	WALL INTERNAL S/M CITY LED MATTE WH RECT UPLIGHT 90D ADJ	3000	244	>40	6	≥80	0.58	17x13x6	1/12