



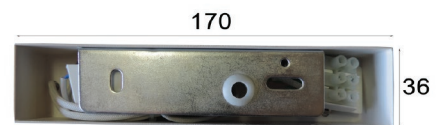

## VENICEG2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-22V
- Driver input current: 0.11A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: iron & aluminium powder coated white
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

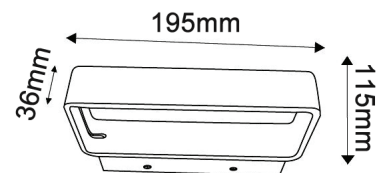

### Back Plate

Depth: 30mm

Mounting U Bracket: 110x30mm

Central 7mm cable entry



PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
VENICEG2	3000	615	92	6	36pcs 2835	>=80	0.61	21x12.5x5	12

Brochure updated on 11.05.2018

Tel: +64 9 427 6133 | Fax: +64 9 427 6134

Email: sales@clalighting.co.nz | Website: www.clalighting.co.nz

CLA LIGHTING NZ