





PDL SERIES

LED EXTERIOR SURFACE MOUNTED WALL/STEP LIGHTS

- Input voltage: 12V DC
- Nominal current: 150mA
- LED chips: 2835 LED
- Ambient temperature: -40 to 85°C

| | | | |
|---|---|----------------------|--------------------------------------|
|  40,000hr Lifetime |  120° Beam Angle | IP65 Rated | 2YEAR Replacement Warranty |
|---|---|----------------------|--------------------------------------|



| Part No. | PDL1SQBRZ |
|-------------|--------------------------------|
| Description | PILLAR LED 1 WAY Square Bronze |
| Material | Bronze |
| Wattage | 3W |
| Kelvin | 3000K |
| Lumens | 300lm |
| CRI | 75 |
| Weight | 0.62kg |
| Box | 10x10x3.5cm |
| Carton QTY | 1/20 |



| Part No. | PDLUDRECTBRZ |
|-------------|------------------------------|
| Description | PILLAR LED UP/DN RECT Bronze |
| Material | Bronze |
| Wattage | 2X3W |
| Kelvin | 3000K |
| Lumens | 2X300lm |
| CRI | 75 |
| Weight | 1.08kg |
| Box | 19.8x9.5x3.5cm |
| Carton QTY | 1/20 |



| Part No. | PDL1SQSS |
|-------------|----------------------------|
| Description | PILLAR LED 1 WAY Square SS |
| Material | 316 Stainless Steel |
| Wattage | 3W |
| Kelvin | 3000K |
| Lumens | 300lm |
| CRI | 75 |
| Weight | 0.58kg |
| Box | 10x10x3.5cm |
| Carton QTY | 1/20 |



| Part No. | PDLUDRECTSS |
|-------------|--------------------------|
| Description | PILLAR LED UP/DN RECT SS |
| Material | 316 stainless steel |
| Wattage | 2X3W |
| Kelvin | 3000K |
| Lumens | 2X300lm |
| CRI | 75 |
| Weight | 0.94kg |
| Box | 19.8x9.5x3.5cm |
| Carton QTY | 1/20 |




| Part No. | PDL1SQBL |
|-------------|-------------------------------|
| Description | PILLAR LED 1 WAY Square Black |
| Material | Aluminium |
| Wattage | 3W |
| Kelvin | 3000K |
| Lumens | 300lm |
| CRI | 75 |
| Weight | 0.19kg |
| Box | 10x10x3.5cm |
| Carton QTY | 1/20 |



| Part No. | PDLUDRECTBLK |
|-------------|-----------------------------------|
| Description | PILLAR LED UP/DN RECT Matte Black |
| Material | Aluminium |
| Wattage | 2X3W |
| Kelvin | 3000K |
| Lumens | 2X300lm |
| CRI | 75 |
| Weight | 0.5kg |
| Box | 20x12x5cm |
| Carton QTY | 1/25 |

RECOMMENDED DRIVERS: All CLA 12V DC Constant voltage drivers

| PART NO. | MIN. LOAD | MAX. LOAD | PDLUDRECT (6W) | PDL1SQ (3W) |
|-----------|-----------|-----------|----------------|-----------------|
| DRIV1 | 1.2W | 9.6W | 1PC / DRIVER | 1-3PCS / DRIVER |
| OTTER1 | 1.2W | 9.6W | 1PC / DRIVER | 1-3PCS / DRIVER |
| CLA111011 | 1W | 8W | 1PC / DRIVER | 1-2PCS / DRIVER |
| CLA113011 | 3W | 24W | 4PCS / DRIVER | 1-8PCS / DRIVER |

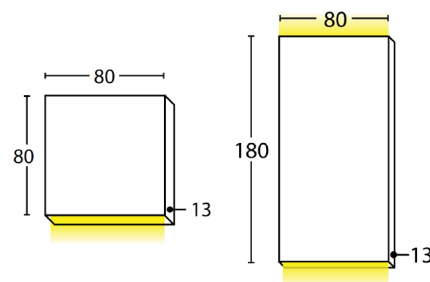

Exterior Lighting