

GU10 EXTERIOR WALL PILLAR LIGHTS (Anodized Aluminium)



Recommended globes:
GU1001 & GU1002



PGUDSHSIL



PG1FHSIL




PG1ASHSIL



PG2ASHSIL

PRODUCT FEATURES

- Input voltage: 110-265V AC 50/60Hz
- Material: aluminium
- Max 35W halogen globe(s)
- GU10 base
- Globes not included
- Recommended CLA LED globes: **GU1001 & GU1002**

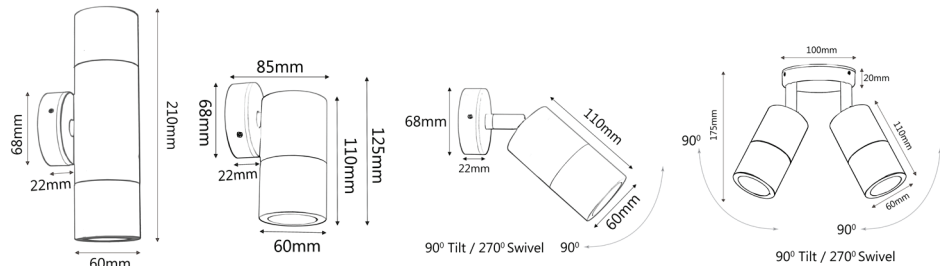

PART NO.	DESCRIPTION	COLOUR	QTY OF GLOBES	WEIGHT (KG)	BOX (CM)	CARTON QTY
PGUDSHSIL	PILLAR GU10 UP/DN Anodized Aluminium	Clear Anodized Al	2xGU10	0.6	10 x 9 x 23	20
PG1FHSIL	PILLAR GU10 FIXED Anodized Aluminium	Clear Anodized Al	1xGU10	0.4	10 x 8 x 14	20
PG1ASHSIL	PILLAR GU10 S/ADJ Anodized Aluminium	Clear Anodized Al	1xGU10	0.4	19 x 8 x 8	20
PG2ASHSIL	PILLAR GU10 D/ADJ Anodized Aluminium	Clear Anodized Al	2xGU10	0.4	12 x 12 x 19	10

Recommended Globes Technical data:

PART NO.	DESCRIPTION	KELVIN	LUMENS	CRI	WATT	WEIGHT (KG)	WEIGHT (KG)	CARTON QTY
GU1001	GLOBE LED GU10 6W 3000K FR 100D	3000K	470LM	80	6	0.07	6 x 6 x 6	100
GU1002	GLOBE LED GU10 6W 5000K FR 100D	5000K	485LM	80	6	0.07	6 x 6 x 6	100

UPDATED ON 23/01/2018

Tel: +64 9 427 6133 | Fax: +64 9 427 6134

Email: sales@clalighting.co.nz | Website: www.clalighting.co.nz