



# 12V MR16 EXTERIOR SPIKE LIGHTS



## PRODUCT FEATURES

- Input voltage range: 12-25V AC/DC
- Material: solid copper/ 316 SS/ aluminium
- Lamp holder: MR16 (Max.20W HAL)
- Globes not included
- Spike length: 1000mm
- Cable included (L 900mm)
- External control gear required



Exterior Lighting



SPM1ALC



SPM1ALSS



SPM1ALBL




SPM2ALC



SPM2ALSS



SPM2ALBL

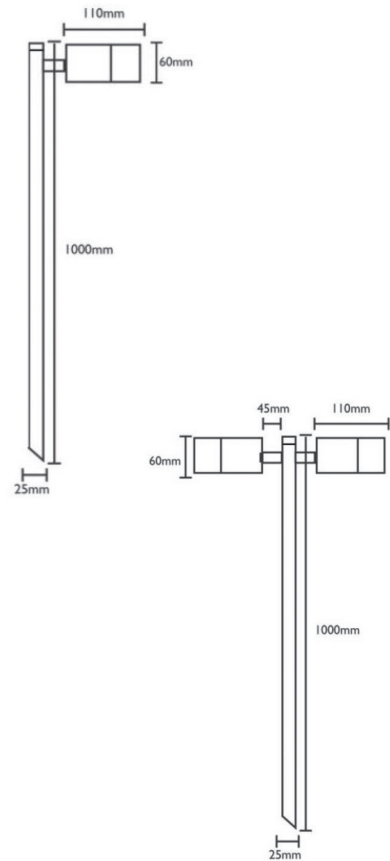

PART NO.	DESCRIPTION	COLOUR	QTY OF GLOBES	WEIGHT (KG)	BOX (CM)	CARTON QTY
SPM1ALBL	SPIKE MR16 12V S/ADJ AL BLK L1000mm	Black powder coated	1xMR16	1.15	7 x 12 x 102	10
SPM1ALC	SPIKE MR16 12V S/ADJ COP L1000mm	Polished copper	1xMR16	1.7	7 x 12 x 102	10
SPM1ALSS	SPIKE MR16 12V S/ADJ SS316 L1000mm	316 Stainless steel clear anodized	1xMR16	1.5	7 x 12 x 102	10
SPM2ALBL	SPIKE MR16 12V D/ADJ BLK L1000mm	Black powder coated	2xMR16	1.6	20 x 7 x 102	10
SPM2ALC	SPIKE MR16 12V D/ADJ COP L1000mm	Polished copper	2xMR16	2.0	20 x 7 x 102	10
SPM2ALSS	SPIKE MR16 12V D/ADJ SS316 L1000mm	316 Stainless steel clear anodized	2xMR16	1.7	20 x 7 x 102	10