




12V MR16 EXTERIOR SPIKE LIGHTS



PRODUCT FEATURES

- Input voltage: 12-25V AC/DC
- Material: aluminium, copper, 316 stainless steel
- Lamp holder: MR16 (Max.20W halogen globe)
- Globes not included
- Cable included (L 2000mm)
- External control gear required

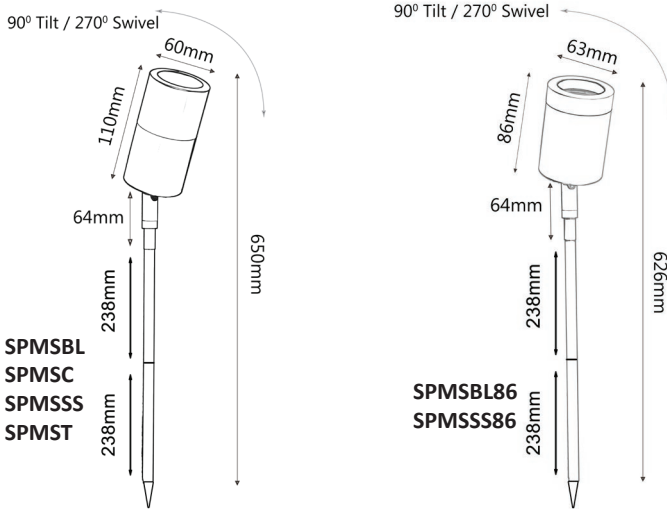

PART NO.	DESCRIPTION	COLOUR	QTY OF GLOBES	WEIGHT (KG)	BOX (CM)	CARTON QTY
SPMSBL	SPIKE MR16 L550mm Aluminium BLK	POWDER COATED BLK	1xMR16	0.55	26 x 7 x 7	1/20
SPMSC	SPIKE MR16 L550mm COP	COPPER	1xMR16	1.15	26 x 7 x 7	1/10
SPMSSS	SPIKE MR16 L550mm SS316	316 STAINLESS STEEL	1xMR16	1.10	26 x 7 x 7	1/10
SPMST	SPIKE MR16 L550mm Titanium	TITANIUM	1xMR16	0.55	26 x 7 x 7	1/20
SPMSBL86	SPIKE MR16 L550mm (L86mm Barrell) Alum BLK	POWDER COATED BLK	1xMR16	0.7	26 x 7 x 7	1/20
SPMSSS86	SPIKE MR16 L550mm (L86mm Barrell) SS316	316 STAINLESS STEEL	1xMR16	1.16	26 x 7 x 7	1/10

* Rod sections can be used as 1 or 2 pieces (to shorten)