



STE SERIES

Exterior LED Surface Mounted Eyelid Step Lights

- Input voltage: 12V-14V DC /220V-240V AC
- Housing: die cast aluminium/ SS 316
- Polished finish
- LED chips: 18pcs SMD3528
- Remote control gear required for 12V models (DC drivers only)




▲STE1,2



▲STE3,4

Tested & Recommended Drivers (for STE1 & 3):

CLADR12W (3) / DRIV1 (3) / OTTER1 (3) / CLA111011 (2) / CLA113011 (8) / CLA115011 (12) / CLA1110011 (25) / CLA1115011 (40) / CLA1120011 (55)

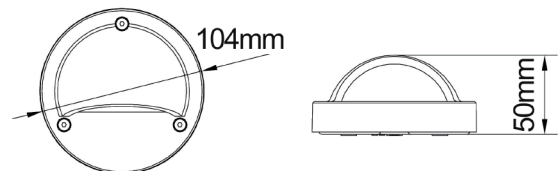

| Part No. | Description | Kelvin | Lumens | Watt | PF | CRI | Dimensions | Back Plate | Carton QTY |
|----------|--------------------------------------|--------|--------|------|------|-----|------------|------------|------------|
| STE1 | STEP EYELID LED 12V DC S/M SS316 RND | 3000K | 144lm | 1W | 1.0 | >70 | Ø104x50mm | Ø104mm | 1/30 |
| STE2 | STEP EYELID LED 240V S/M SS316 RND | 3000K | 144lm | 1W | >0.3 | >70 | Ø104x50mm | Ø104mm | 1/30 |
| STE3 | STEP EYELID LED 12V DC S/M BLK RND | 3000K | 144lm | 1W | 1.0 | >70 | Ø104x50mm | Ø104mm | 1/48 |
| STE4 | STEP EYELID LED 240V S/M BLK RND | 3000K | 144lm | 1W | >0.3 | >70 | Ø104x50mm | Ø104mm | 1/50 |