

## sales@clalighting.co.nz

Tel: +64 9 427 6133 | Fax: +64 9 427 6134





## LED SURFACE MOUNTED BATTEN (4FT) with inbuilt sensor

• Input voltage: 220-240V AC 50/60Hz

• Material: Aluminium & PC

• Wattage: 50W

Power factor: ≥0.9

• LED chips: 480pcs Sanán SMD2835

• Built in Microwave sensor (**SENS006**)

• CRI: 82

• Ambient Temperature: -20 to 40°C

• Not suitable for dimming

• Suitable for 2-way switching

• Wired at one end (either rear or side cable entry)


• Mounting feet / spacer removeable










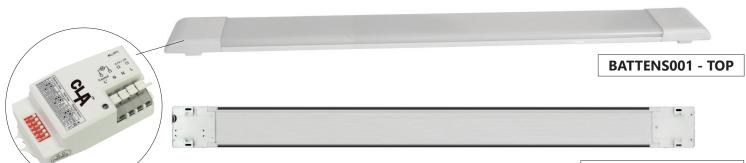

## **BATTENS001 - BACK**

## **Inbuilt Sensor - SENS006**

- The distance to operate the sensor: 5m
- Sensor beam angle: 30 to 150°
- 4 different hold time modes
- Easy set-up switch

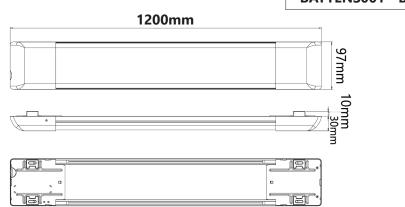

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT	CRI	WEIGHT (KG)	BOX (CM)	CARTON QTY
BATTENS001	BATTEN LED S/M WH 5000K 50W 160D 1200mm 4FT	5000	4500	50	82	1.42	124 x 12 x 5.2	1/10