




RAZORDMW SERIES

LED Interior Surface Mounted Battens (Wide)
DIMMABLE TRI-CCT



Product Features:

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt driver included
- Diffuser: PC (white)
- Housing: powder coated aluminium
- Heatsink: aluminium
- **High power factor: ≥ 0.9**
- Colour temperature changeable: 3000K/ 4000K/ 5000K
- Internal switch (under diffuser)
- Central hole in mounting plate
- LED chips: SMD2835
- CRI: >80
- Ambient temperature: -20 to 40°C
- Suitable for dimming with most trailing edge dimmers
- Suitable for 2-way switching
- Suitable for use with 3 wire Microwave & Motion sensors

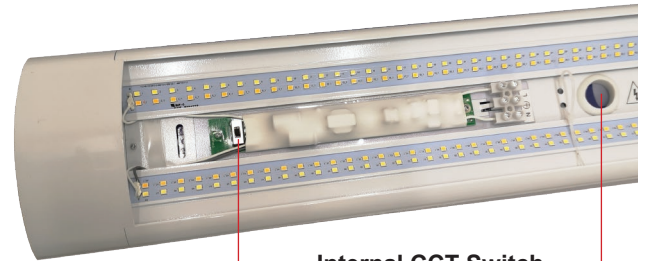


Internal CCT Switch

Central hole in mounting plate




Tested & Recommended Dimmers:

BRAND	PART NO.	PCS PER DIMMER
CLA	LYNX, VELA	RAZORDMW01: 1-10PCS RAZORDMW02: 1-6PCS
CLIPSAL	32E450TM, 32E450UDM 32ELEDM 400W 41E300P- BUD2SM-VM	
HPM	Cat 400L, Cat400T, MMDM/ BP400W, MMDM(RT)400W	



RAZORDMW01



RAZORDMW02

PART NO.	LUMENS			WATT	CRI	POWER FACTOR	DIMENSIONS	WEIGHT	BOX	CARTON QTY
	3000K	4000K	5000K							
RAZORDMW01	1500lm	1700lm	1500lm	18W	>80	≥ 0.9	600x120mm	0.65kg	61x12.7x4.5cm	1/10
RAZORDMW02	3000lm	3400lm	3000lm	36W	>80	≥ 0.9	1200x120mm	1.25kg	121x12.7x4.5cm	1/10