



COSMO SERIES

LED FIXED WHITE DOWNLIGHTS DIMMABLE TRI-CCT


3000K	4000K	5700K
-------	-------	-------

- Input voltage: 220-240V AC 50/60Hz
- External Constant current LED driver included
- Housing & heatsink: plastic & aluminium
- Diffuser: Opal PC
- Faceplate: PBT
- Power factor: 0.9
- Colour temperature changeable: 3000K/ 4000K/ 5700K
- CCT switch on driver
- LED chips: SMD2835
- CRI: ≥80
- Flex & plug: 600mm
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with motion sensor
- IP20 (IP44 for front face)




Decor Lighting

30,000hr Lifetime	110° Beam Angle	IP20 Rated	DIMMABLE	3YEAR Replacement Warranty	
-------------------	-----------------	------------	----------	----------------------------	--




Tested & Recommended Dimmers:


BRAND	PART NO.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM,
HPM	CAT250T, CAT400T
DIGINET	MEDM, MMDM/RT

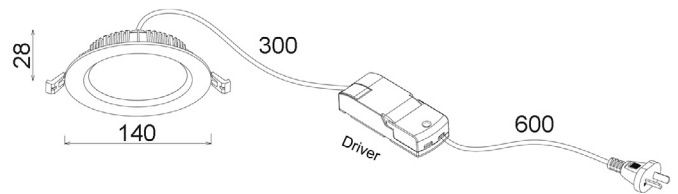

COSMOTRI03

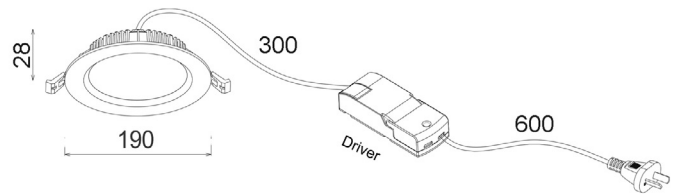

COSMOTRI04

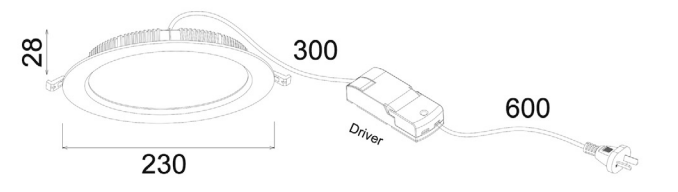

COSMOTRI05

*Please check with Licenced electrician for Min and Max dimmer load

*May be compatible with other untested dimmers

Part No.	Lumens			Watt	CRI	Power Factor	Dimensions	Cut Out	Box Weight	Box	Carton QTY
	3000K	4000K	5700K								
COSMOTRI03	1200lm	1350lm	1250lm	15W	≥80	0.9	Ø140x28mm	Ø110-120mm	0.25	15x15x7cm	1/30
COSMOTRI04	1800lm	2000lm	1900lm	20W	≥80	0.9	Ø190x28mm	Ø155-170mm	0.44	20x20x7cm	1/20
COSMOTRI05	2250lm	2500lm	2375lm	25W	≥80	0.9	Ø230x28mm	Ø195-200mm	0.58	24x24x7cm	1/20

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)