



# TUBO

## LED Recessed Tri-CCT Tiltable & Rotatable Spot Downlights



(Cutout: 70-90mm)



### Product Features:

- Input voltage: 220-240V AC 50/60Hz
- External Constant Current LED driver
- Diffuser: PC
- Housing & heatsink: aluminium
- **Tilt: 90° / Swivel: 355°**
- LED chips: 1pc COB
- Tri-CCT (3000K/ 4000K/ 6000K) in one fitting
- CCT switch on driver
- Power factor: 0.9
- CRI: 80
- Flex & plug: 0.6m
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor

30,000hr Lifetime	40° Beam Angle	<b>IP20</b> Rated	DIMMABLE	<b>3 YEAR</b> Replacement Warranty
-------------------	----------------	----------------------	----------	---------------------------------------

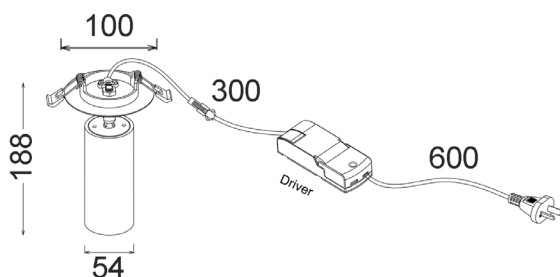

### Tested and Recommended Dimmers:

Brand	Part No.
CLA	LYNX, VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM
DIGINET	MEDM, MMDM/RT
HPM	CAT250T, CAT400T

\*Please check with Licenced electrician for Min and Max dimmer load

\*May be compatible with other untested dimmers

Part No.	Description	Lumens			Watt	Housing		Cut out	Box Dimension	Box Weight	Carton Qty
		3000K	4000K	6000K		Length	Diam				
TUBO1	D/L Recessed Adjustable DIMM Spot 10W WH Tri	800LM	850LM	820LM	10W	125mm	Ø54mm	Ø70-90mm	11x11x20cm	0.5kg	1/20
TUBO2	D/L Recessed Adjustable DIMM Spot 10W BLK Tri	800LM	850LM	820LM	10W	125mm	Ø54mm	Ø70-90mm	11x11x20cm	0.5kg	1/20

\*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)