




LED TRI-CCT OYSTER LIGHTS

General Lighting



PRODUCT FEATURES:


- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver output voltage: 60-80V DC
- Base: metal
- Diffuser: PS
- LED chips: SMD2835 LED
- Power factor: >0.9
- Colour temp changeable: 3000K/4000K/5000K
- CRI: 80
- Ambient Temp: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or microwave sensors
- Changes to appearance due to climatic conditions not covered under warranty

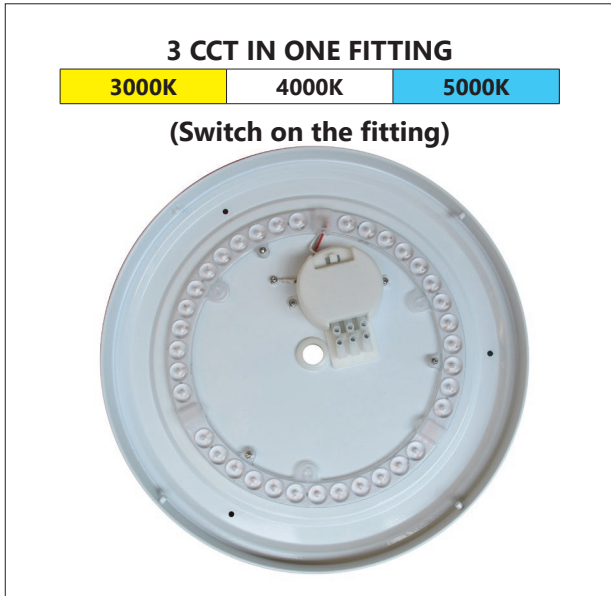


| | | | | |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  30,000hr Lifetime |  150° Beam Angle |  IP44 Rated |  DIMMABLE |  3 YEAR Replacement Warranty |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|

Tested & Recommended Dimmers:


| Brand | Part No. | PCS Per Dimmer |
|---------|------------------------------------------------------------|-------------------------------------------------------------|
| CLA | LYNX, VELA | OYSDIM003: 1-9pcs OYSDIM004: 1-7pcs OYSDIM005: 1-5pcs |
| HPM | CAT250T, CAT400T & CAT250L | |
| DIGINET | MEDM & MMEM/RT | |
| CLIPSAL | 32E450UDM, 31E2PUDM, 32E450LM, 32ELEDM-WE & 32E450TM | |

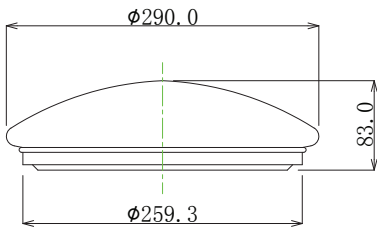

OYSDIM003

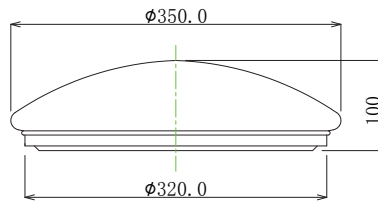

OYSDIM004

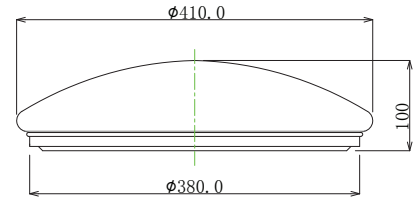

OYSDIM005

| Part No. | Description | Kelvin | Lumens | Watt | CRI | Diam | Back Plate | Weight | Box | Carton QTY |
|-----------|-------------------------------------|-------------------------|--------------------------|------|-----|--------|------------|--------|------------|------------|
| OYSDIM003 | OYSTER LED DIMM WH Trim RND 12W Tri | 3000/ 4000/ 5000K | 960/ 1140/ 1020lm | 12W | 80 | Ø290mm | Ø259.3mm | 0.6kg | 30x30x10cm | 1/10 |
| OYSDIM004 | OYSTER LED DIMM WH Trim RND 18W Tri | 3000/ 4000/ 5000K | 1400/ 1650/ 1500lm | 18W | 80 | Ø350mm | Ø320mm | 0.85kg | 37x37x11cm | 1/10 |
| OYSDIM005 | OYSTER LED DIMM WH Trim RND 24W Tri | 3000/ 4000/ 5000K | 1700/ 2000/ 1800lm | 24W | 80 | Ø410mm | Ø380mm | 1.1kg | 42x42x11cm | 1/8 |