

SEC SERIES

Surface mounted **LED PAR30** Security Lights with / without sensor



SEC01



SEC01S (with sensor)


Fitting Features:

- Adjustable: up/down & side to side
- Input voltage: 200-240V AC
- Housing: PBT + PC
- E27 lamp holder
- Max.150W halogen PAR30 globes
- **10W LED PAR30 globes included**

Sensor Spec:

- Detection range: 180°
- Detection distance: 5-12m
- Detection motion speed: 0.6-1.5m/s
- Rated load: 1200W (HAL) 300W (CFL & LED)
- Time delay: Min: 10s±3s; Max: 10m±10m
- Ambient light: 3-2000 lux (adj)
- Ambient temp: -10 to 40°C
- Installation height: 1.8-2.5m
- Manual override via light switch

IP44
Rated



3 YEAR
Replacement
Warranty



SEC02




SEC02S (with sensor)


Part No.	Description	GLOBE SPECIFICATION						WEIGHT (KG)	BOX (CM)	CARTON QTY
		LED	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	BEAM ANGLE			
SEC01	SECURITY PAR30 ES S/ADJ BLK without sensor	10PCS SMD 2835	5000	800	10	80	40°	0.4	22x11x11	40
SEC01S	SECURITY PAR30 ES S/ADJ BLK with sensor		5000	800	10	80	40°	0.55	25x15x11	32
SEC02	SECURITY PAR30 X 2 ES D/ADJ BLK without sensor		5000	2x800	2x10	80	40°	0.65	32x13x11	24
SEC02S	SECURITY PAR30 X 2 ES D/ADJ BLK with sensor		5000	2x800	2x10	80	40°	0.85	30x14x14	24

Globe Other Spec:


- Power factor: ≥0.5
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Life time: 30,000hrs
- IP rating: IP44
- Ambient temp: -10 to 40°C (The life of the lamp will gradually reduce if used outside these temperature parameters.)




SEC01



SEC01S

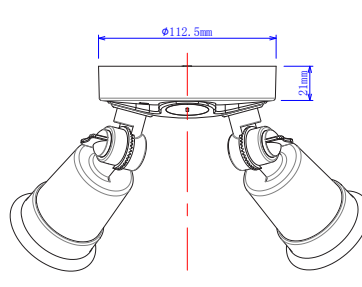

SEC02

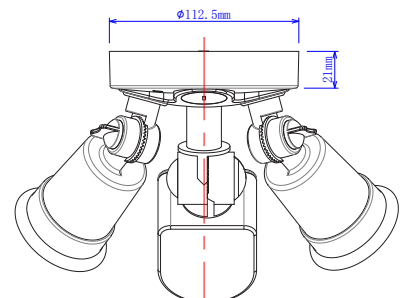

SEC02S

UPDATED ON 03.09.2018