



LED GLS TRI-CCT GLOBES (10W)

- Input voltage: 176-264V AC
- Diffuser: plastic frosted
- Housing: plastic & aluminium
- Heatsink: PBT
- LED chips: 16pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 5000K)
- CCT switch on housing
- CRI: ≥80
- Power factor: ≥0.5
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors



 20,000hr Lifetime	 180° Beam Angle	IP20 Rated	2YEAR Replacement Warranty
--	---	----------------------	---



GLSTRIBC1



GLSTRIES1

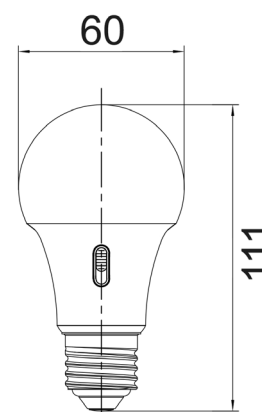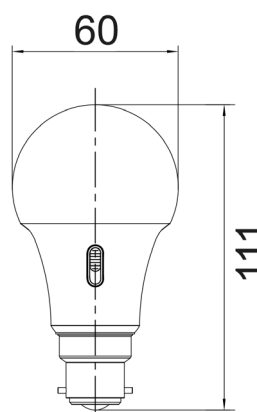

LED Globes

Part No.	Description	Base	Lumens			Watt	Size	Box Weight	Box Size	Carton QTY
			3000K	4000K	5000K					
GLSTRIBC1	GLOBE LED BC GLS 10W TRI	B22	729lm	792lm	891lm	10W	Ø60x111mm	0.06kg	6x6x12cm	1/10/50
GLSTRIES1	GLOBE LED ES GLS 10W TRI	E27	729lm	792lm	891lm	10W	Ø60x111mm	0.07kg	6x6x12cm	1/10/50