




Globes - LED

G4 BI-PIN LED GLOBES

- Input voltage: 12V DC constant voltage
- Runs off 12V DC battery or remote constant voltage LED driver
- Must be wired parallel
- Power factor: 0.9
- G4 base only
- Ambient temp: -30 to 40°C
- Max.distance to light source: 30m
- Not suitable for dimming

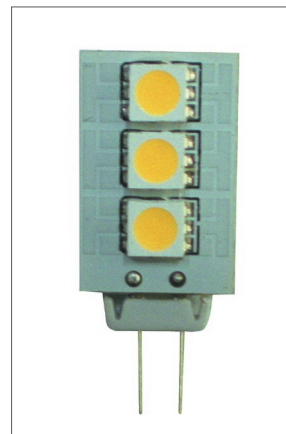

▲ CLAG4L3



▲ CLAG4L15

PART NO.	DESCRIPTION	BASE	KELVIN (K)	LUMENS (LM)	WATT (W)	BEAM ANGLE	CRI	LENGTH (mm)	DIAM (mm)	CARTON QTY
CLAG4L15WW	GLOBE LED 12V DC G4 1.5W	G4	2700	73	1.5	180°	66	38	Ø16	1/100
CLAG4L15CW	GLOBE LED 12V DC G4 1.5W	G4	5000	85	1.5	180°	66	38	Ø16	1/100
CLAG4L3WW	GLOBE LED 12V DC G4 0.9W	G4	3000	50	0.9	180°	60	33	15	1/100
CLAG4L3CW	GLOBE LED 12V DC G4 0.9W	G4	5000	60	0.9	120°	60	33	15	1/100