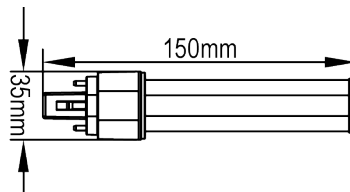





LED PLC GLOBES





Product Features:

- Input voltage: 220-240V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing: PC
- Heat sink: aluminium alloy
- Diffuser: PC
- LED chips: 22pcs SMD5630
- Power factor: 0.9
- CRI: 80
- Ambient temp: -20 to 45°C
- Not suitable for dimming
- Not suitable for 2 way switching
- Not suitable for use with sensors

- To be used with magnetic ballast only (2 pin)
- When retrofitting luminaire with electronic ballast, bypass the electronic ballast and rewire the circuit as per wiring example shown below.
- 3 year replacement warranty based on max.8hrs usage per day

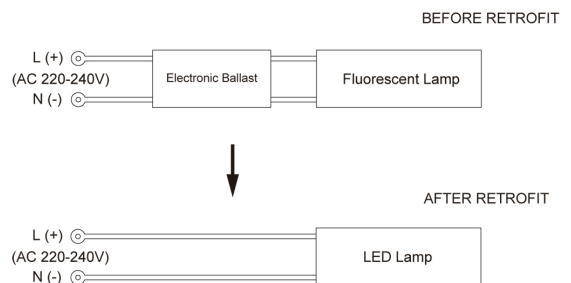

G24d


25,000hr
Lifetime


130°
Beam Angle

IP20
Rated

3YEAR
Replacement Warranty



PART NO.	DESCRIPTION	BASE	KELVIN	LUMENS	WATT	DIMENSION	WEIGHT	BOX	CARTON
PLC002	GLOBE LED PLC G24d 2 pin 8W 4000K	G24D	4000K	675LM	8W	53x150MM	0.08kg	3.6x3.6x15.2cm	1/10/50