




R7 LED Globes

- LED R7S globes
- Input Voltage range: 220-240V
- Diffuser: clear glass
- Housing: glass & ceramic
- Heatsink: glass
- LED chips: 1 COB LED
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors

| | | | |
|----------------------|--------------------|----------------------|---|
| 25,000hr Lifetime | 360° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty |
|----------------------|--------------------|----------------------|---|

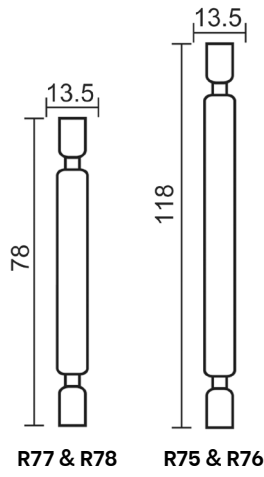

Globes - LED

| Part No. | Description | Base | Kelvin | Lumens | Watt | CRI | Dimensions | Weight | Box | Carton QTY |
|------------|-----------------------------|------|--------|--------|------|-----|-------------|--------|----------|------------|
| R75 | GLOBE LED R7 118mm 8W 3000K | R7 | 3000K | 1000LM | 8W | 80 | Ø13.5x118mm | 0.03kg | 2x2x13cm | 1/500 |
| R76 | GLOBE LED R7 118mm 8W 5000K | R7 | 5000K | 1000LM | 8W | 80 | Ø13.5x118mm | 0.03kg | 2x2x13cm | 1/500 |
| R77 | GLOBE LED R7 78mm 4W 3000K | R7 | 3000K | 400LM | 4W | 80 | Ø13.5x78mm | 0.02kg | 2x2x9cm | 1/500 |
| R78 | GLOBE LED R7 78mm 4W 5000K | R7 | 5000K | 400LM | 4W | 80 | Ø13.5x78mm | 0.02kg | 2x2x9cm | 1/500 |

