



MR16 LED COLOURED GLOBES



Product Features:

- Input voltage: 12V
- Housing & diffuser: aluminium alloy & PC
- Wattage: 5W (=30W incandescent)
- Power factor: 0.8
- 10pcs SMD2835 LED chips
- MR16 lamp holder
- Ambient Temp: -10 to 40°C (The life of the lamp will gradually reduce if used outside these temperature parameters.)
- Suitable for 2-way switching
- Suitable for use with PIR sensor

NB: remote AC or DC control gear required

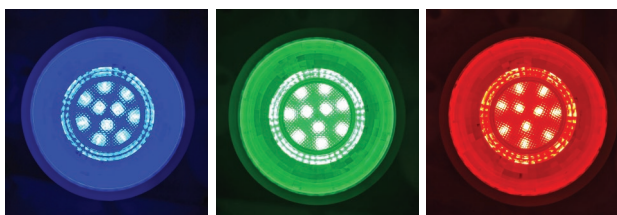

MR16B01

MR16G01

MR16R01

Part No.	Description	Kelvin (K)	Lumens (LM)	Watt (W)	CRI	Weight (kg)	Box (cm)	Carton QTY
MR16B01	GLOBE LED 12V AC/DC (White) MR16 5W BLUE	BLUE	65	5=30	N/A	0.05	6x5x5	200
MR16G01	GLOBE LED 12V AC/DC (White) MR16 5W GREEN	GREEN	50	5=30	N/A	0.05	6x5x5	200
MR16R01	GLOBE LED 12V AC/DC (White) MR16 5W RED	RED	50	5=30	N/A	0.05	6x5x5	200

Tested & Recommended Control Gears:

BRAND	PART NO.	TYPE	IP RATING	MIN-MAX LOAD	QTY OF GLOBES
LUXMAN	ETH50.302VA (50W)	Transformer	IP65	10W-40W	2-6
CLA	CLADR12W	LED Driver (Constant Voltage)	IP20	1.2W-9.6W	1
CLA	DRIV1	LED Driver (Constant Voltage)	IP20	1.2W-9.6W	1
CLA	OTTER1	LED Driver (Constant Voltage)	IP67	1.2W-9.6W	1
OSRAM	ET-REDBACK (20-60W)	Transformer	INDOOR	20-60W	4-9
ATCO	Possum (20-60W)	Transformer	INDOOR	20-60W	4-9
CLA	CLA111011	LED Driver (Constant Voltage)	IP67	1-8W	1
CLA	CLA113011	LED Driver (Constant Voltage)	IP67	3-24W	3
CLA	CLA115011	LED Driver (Constant Voltage)	IP67	5-40W	5
CLA	CLA1110011	LED Driver (Constant Voltage)	IP67	10-80W	10
CLA	CLA1115011	LED Driver (Constant Voltage)	IP67	15-20W	15
CLA	CLA1120011	LED Driver (Constant Voltage)	IP67	20-160W	20